

36 KEY COMMANDER KEYBOARD

Sealing IP67 frontal, PS/2 or USB compatible

This unit consists of 36 numerical, function and control keys and a compact 25mm industrial grade trackball. The condensed but well defined key layout together with the use of a separate trackball enables a fast and comfortable access of the most important machine commands and an accurate control of the screens' cursor.



KSTC36F1
dim : 182 x 135 x 25 mm
weight : 0,3 kg

Features

- 36 short travel, tactile feel switches with 2.55 N operating force
- compact 25mm trackball with IP65 static sealing grade
- front of panel mounting by eight M3 mounting studs
- sealing into customers' panel guaranteed by added silicone sealing sponge
- directly connectable to PS/2 or USB ports via shielded cable(s) of 1.6 meter

Applications

- navigation control
- general machine control
- public access terminal
- alarm systems consoles
- measurement equipment
- and... many others

• CONNECTIVITY

The keyboard has 1,6 meter shielded cable(s) ended by a PS/2 or USB type A plug. Use the drivers standardly available in your operating system.

** Due to the increasing differences of PS/2 mouse port specifications of the various PC manufacturers, we do recommend that this unit should be tested on the final PC configuration and operating system prior to installing it in series.*


• ORDERING INFO

KSTC36F1 yyy	36 key, commander keyboard
---------------------	----------------------------

yyy = protocol output :
PS2 = PS/2 output
USB = USB output

36 KEY COMMANDER KEYBOARD

• DIMENSIONAL DRAWING

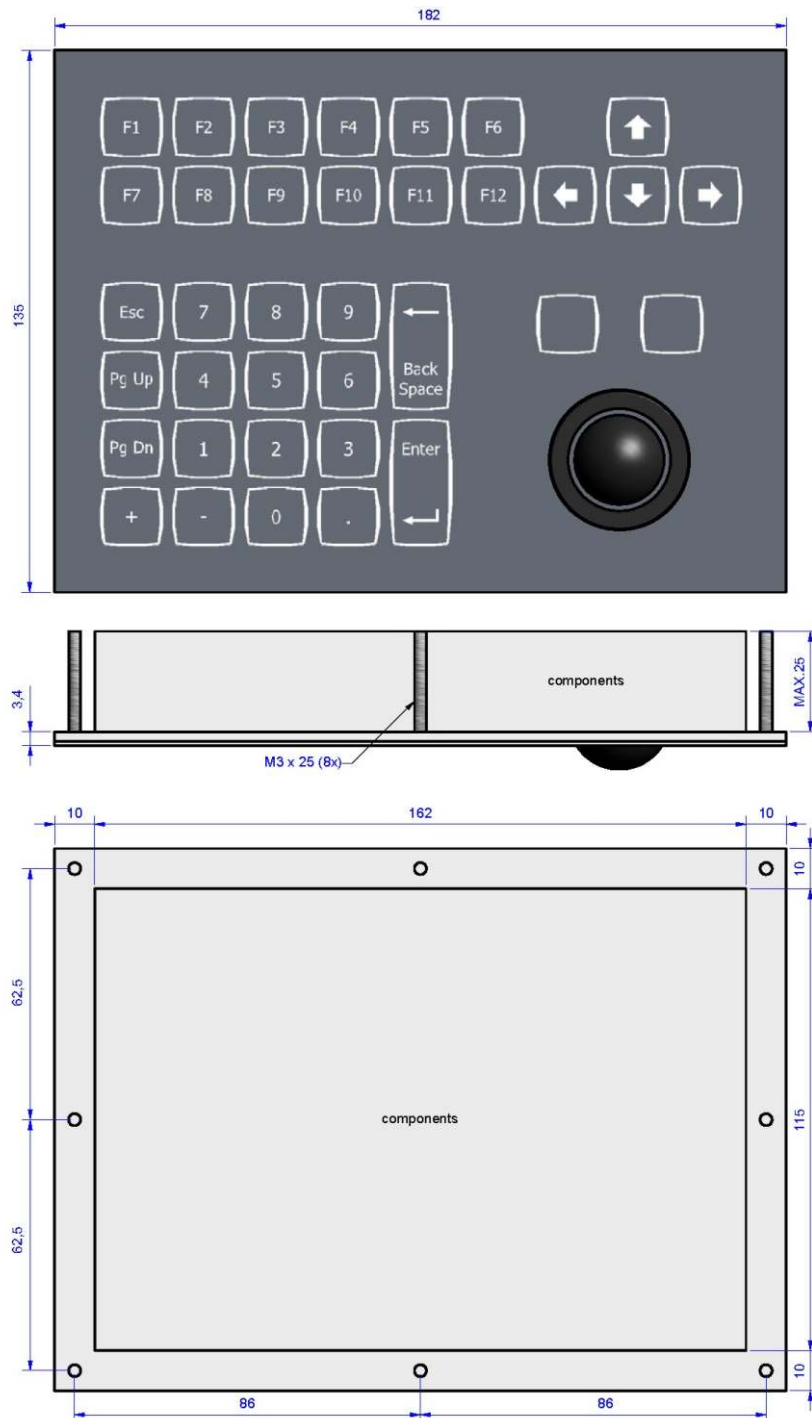

Dim in mm

COLOURS

Keyboard Background :
RAL7016 anthrasite grey

Key edges & key legends :
RAL9016 Traffic white



NSI bvba, Haakstraat 1A, B-3740 Bilzen, Belgium
 Tel. : ++32 (0) 89 51 90 00 Website : www.nsi-be.com
 Fax : ++32 (0) 89 51 90 09 E-mail : info@nsi-be.com