


PS3000-BA

OS	Windows®2000 / Windows®XP / Windows®XP Embedded
CPU	ULV Celeron M 1.0GHz
BIOS	Phoenix First BIOS Embedded Pro
Memory	DDR DRAM 256MB to 1GB
Video memory	64MB maxi
Serial	2
Com 1	RS-232C
Com 2	RS-232C
Com 3	No
Com 4	No
CF-card	2
Ethernet	2
USB	4
RAS	Yes
PCMCIA	2
Sound	Speaker OUT
PCI	1
Rated voltage	AC100V to 240V
Power consumption	120 VA or less
Surrounding Air Temperature	"5 to 50°C (with HDD) 0 to 50°C (without HDD)"
External dimensions (wxhxd)	255mm x 164 mm x 124 mm



- ▣ PS3000-BA
- ▣ Win.XP / Win.XP Embedded
- ▣ ULV Celeron M 1.0GHz
- ▣ SIO x 2 - USB x 4 -Ethernet X 2 -
- ▣ AC100V to 240V

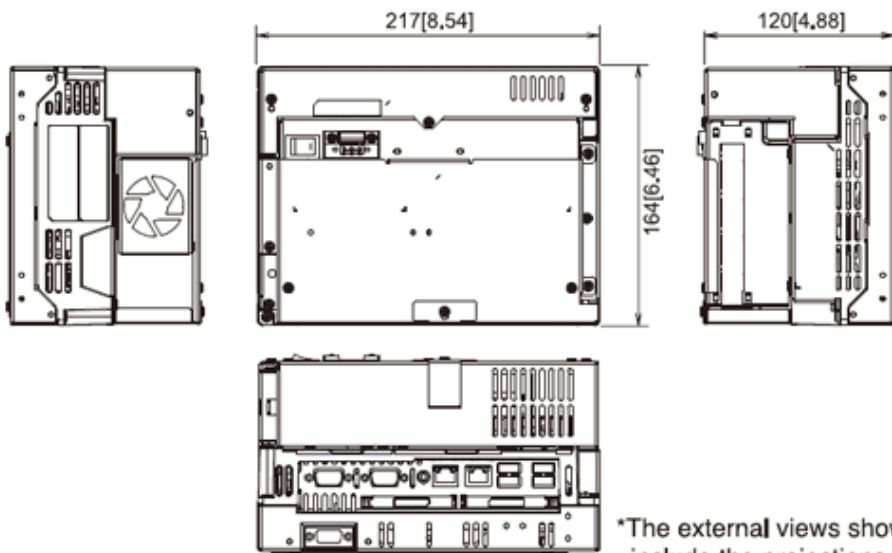