




PS3001-BD

OS	Windows®2000 / Windows®XP / Windows®XP Embedded
CPU	ULV Celeron M 600MHz
BIOS	Phoenix First BIOS Embedded Pro
Memory	DDR DRAM 256MB to 1GB
Video memory	64MB maxi
Serial	2
Com 1	RS-232C
Com 2	RS-232C
Com 3	No
Com 4	No
CF-card	2
Ethernet	2
USB	4
RAS	Yes
PCMCIA	2
Sound	Speaker OUT
PCI	No
	Fanless
Rated voltage	DC24V
Power consumption	120 VA or less
Surrounding Air Temperature	5 to 50°C
External dimensions (wxhxd)	255mm x 164 mm x 68.8 mm

- ▶ PS3001-BD
- ▶ Win.XP / Win.XP Embedded
- ▶ ULV Celeron M 600MHz
- ▶ SIO x 2 - USB x 4 -Ethernet X 2 -
- ▶ DC24V

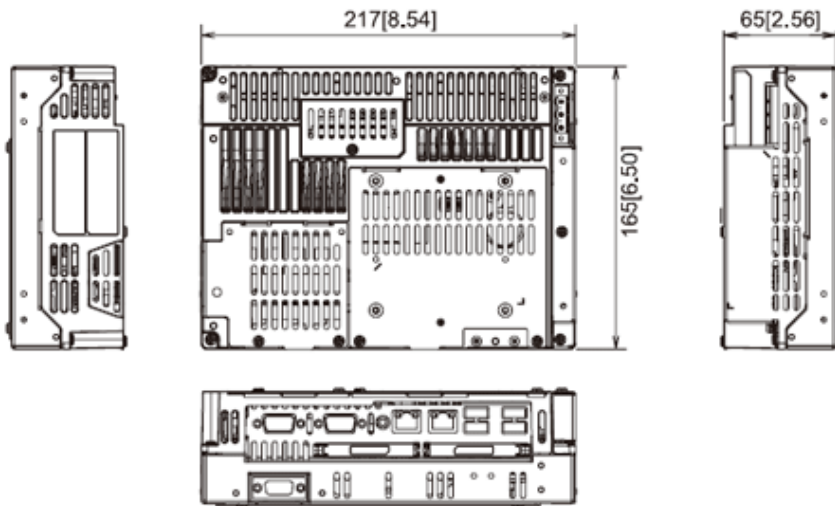

*The external views show above don't include the projections.

