Fortress Interlocks

amGard pro

Datasheet

Head Modules

*pro*AT Head & Tongue Actuator

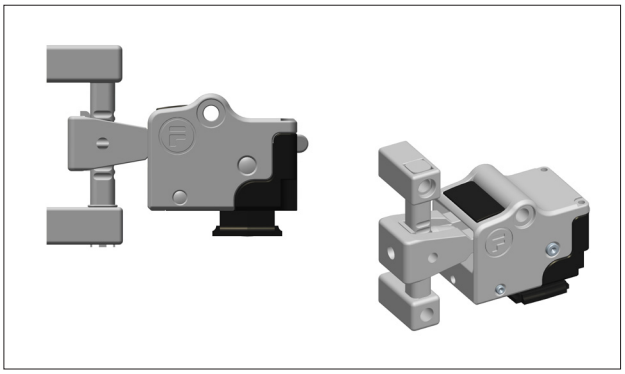

Images above show a TA2T6 (left handed)

*pro*AT Head & Tongue Actuator

- Heavy duty tongue unit.
- Ideal for fast, frequent access.
- 4 position fixing at 90° increments allowing on site handing change.
- Misalignment tolerance of +/- 12mm.
- 12mm Overtravel allowance.
- Retention force 10,000N when top fixing is used.
- Can be fitted with lock-out devices for additional safety.
- Mounted upside down it is self cleaning, ideal for dusty environments.

*pro*AT Head & Tongue Technical Specification

Housing Materials	Zinc Alloy to BSEN12844 Stainless Steel to BS3146
Paint Finish	Gloss powder coat on passivated zinc alloy
Colour	Black and Stainless Steel
Retention Force (locked)	10,000N
Mechanical Life	>1,000,000 Switching Cycles
Performance Level	PLe
B10d	5,000,000
Ambient Temperature	-5°C to 80°C (23°F to 176°F)

*pro*AT Head Options & Ordering Information

Part Number	Item No.	Description
T6	ITM-00038819	proAT Head
T7	ITM-00038824	proAT Head c/w Drop Down Lockout
T8	ITM-00038830	proAT Head c/w ATL Lock-Out Clip

* The Item No. or Part No. can be quoted for quotation and ordering purposes

*pro*AT Tongue Options & Ordering Information

Part No.	Item No.	Item No.
TA1	AT Tongue Front Handing	ITM-00038780
TA2	AT Tongue Left Handing	ITM-00038806
TA3	AT Tongue Back Handing	ITM-00038807
TA4	AT Tongue Right Handing	ITM-00038808

* The Item No. or Part No. can be quoted for quotation and ordering purposes



proAT Head c/w Drop Down Lockout

ATL Lock-Out Clip
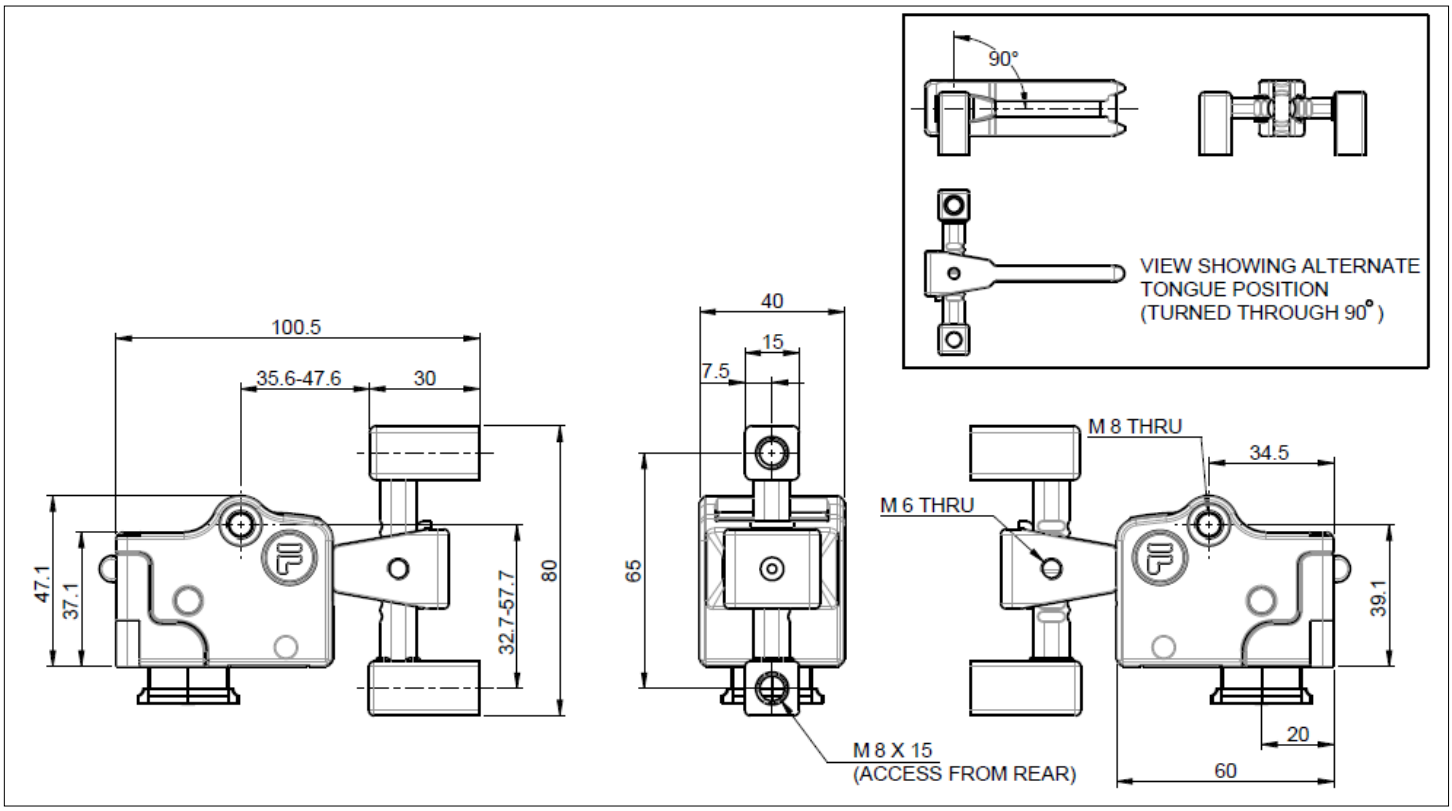
Dimensional Drawing